



DE DYNAMICTM
Process Equipment

Optical Dissolved Oxygen Transmitter
SmartSense DO-2001-O-AD

Core Features of SmartSense Transmitters





Waterproof protection

Provides the instrument safety with IP65 waterproof protection and front flap cover design for easy installation and wiring.

Dot-Matrix LCD

For convenience and better process safety, it reveals the last calibration records and a system setting overview

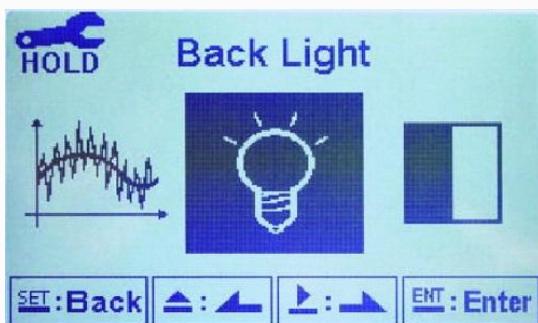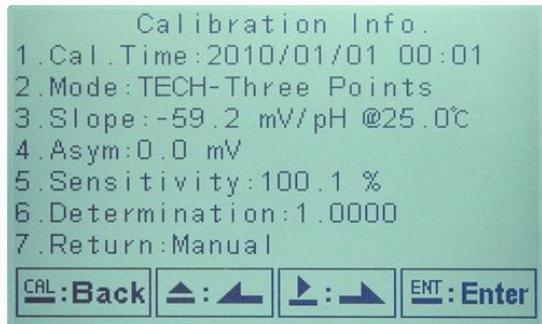


Auto-Sense Backlight Display


For clear reading and energy saving, it turns on the backlight automatically when the environment becomes dark.

Graphical Menu

Allows extremely intuitive & quick setting and calibration.


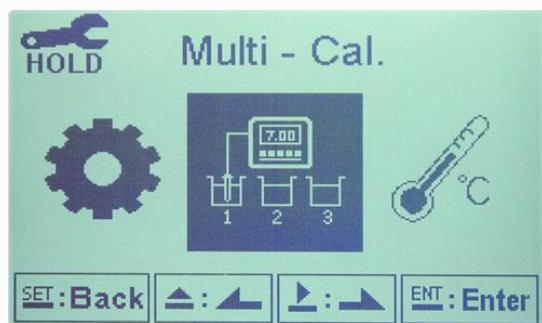


Special Features of Advanced Version Transmitters

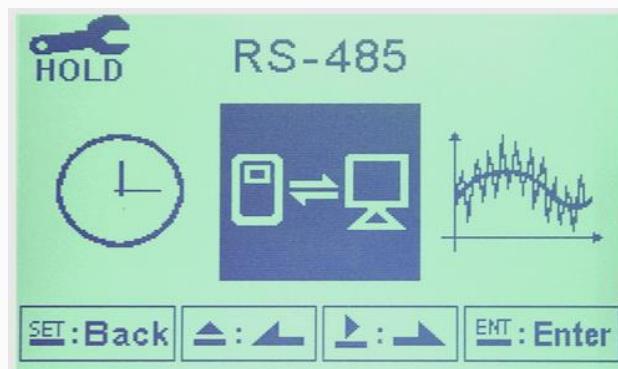

RS-485 MODBUS protocol
Provides long-distance, multiple values and configuration info transmission and anti-electrical signal protection

Real-time chart mode
3 minutes real-time dynamic graph to help you realize recent development in control

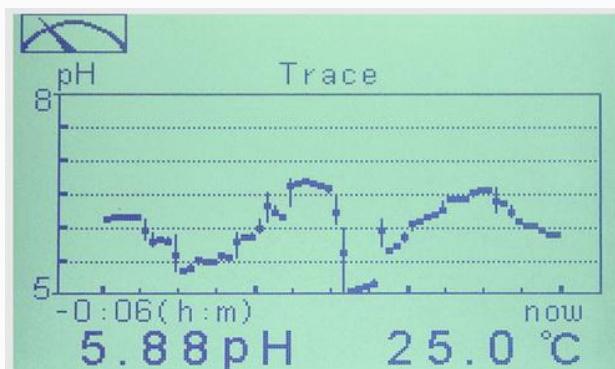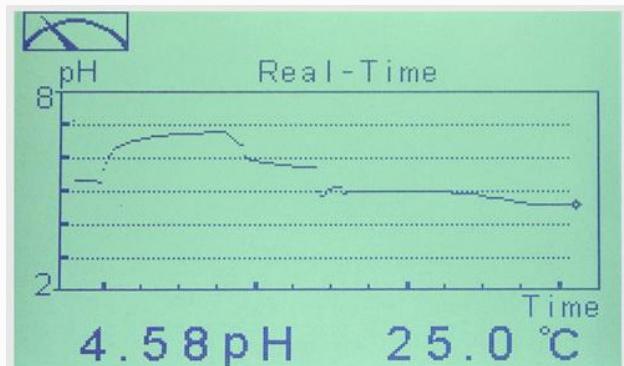


Trace mode
Set up from 3 mins to four weeks duration of the measured value trend graph to help you master the process history

Events logbook
Actions, current output out of range, power outages and error records, no need for standby and record them anymore

Page 1		
11/06/29	15:33:56	Set mode
11/06/29	15:33:49	Mea mode
11/06/29	15:33:47	Set mode
11/06/29	15:31:22	Mea mode
11/06/29	15:30:58	Set mode
11/06/29	15:30:26	Mea mode
11/06/29	15:29:59	Set mode

SET: Back ▲: ▲ ▼: ▼

Transmitter Dimension DIN ½, 144 x 144:

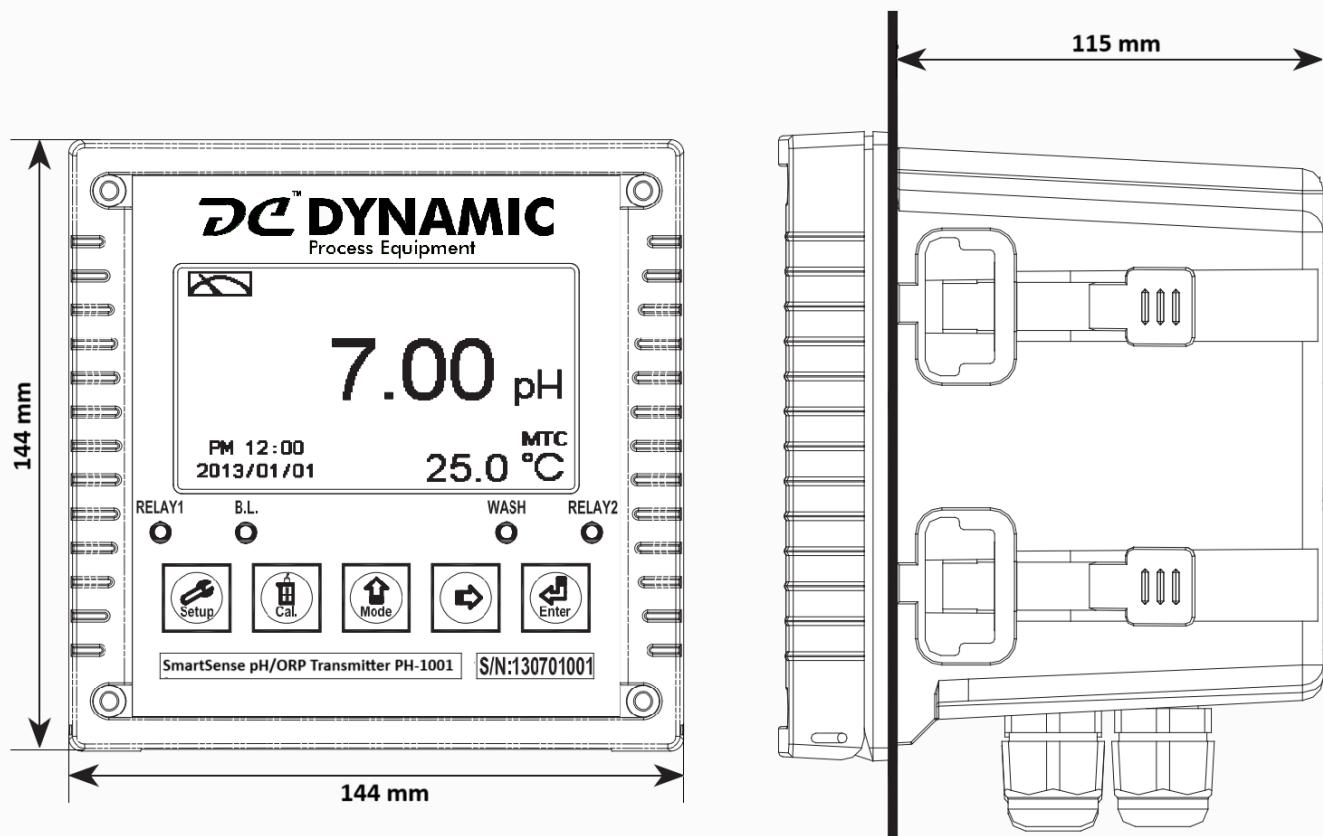

SmartSense Dissolved Oxygen Transmitter for Optical Sensor

DO-2001-O-AD



DO-2001-O-AD is an intelligent transmitter designed for measuring dissolved oxygen with an Optical DO sensor. In a robust IP65 enclosure, it features intuitive graphical menus, ensuring ease of use. Measurements can be presented numerically or in curve display format. Additionally, it provides an events logbook and an RS-485 communication.

Applications

- Bio Reactors
- Fermentation
- Industrial Process
- Water & Wastewater Treatment
- Effluent Treatment

Features

- Waterproof and dustproof design
- Compatible with our optical oxygen probes, polarization-free and no membrane cleaning
- User-friendly operation with text and graphic illustration, clear signs and easy to understand
- With password and multi-key design-security protection enhancement
- Chart mode, Trace Mode for graphical data interpretation
- RS-485 MODBUS RTU Digital Output
- Hi/Lo, Hi/Hi, Lo/Lo selectable two limited contact outputs with programmable set-points and hysteresis
- Sensor slope status indicator for pre-amplifier sensor
- Salinity correction & atmospheric pressure correction
- Automatic sensor clean function with programmable time interval
- LED indicated alarm or washing status signal
- IP 65 (NEMA 4X)

Specification:

Optical Dissolved Oxygen Transmitter SmartSense DO-2001-O-AD	
Model	DO-2001-O-AD
Measuring Modes	%Sat / %O2 / ppm / mg/L / ppb / µg/L / Temp.
Measurement Range	% Saturation 0.0 to 600.0%, (Depends on the sensor)
	mg/L, ppm 0.00 to 60.00 mg/l (ppm), (Depends on the sensor)
	µg/l, ppb 0.0 to 9999.9 µg/l (ppb), (Depends on the sensor)
	O2% 0.00 to 120.0% O2, (Depends on the sensor)
	Temperature 0.0 to 140.0°C (Depends on the sensor), ±0.1°C (±1 Digit)
Temperature Compensation	NTC 30K or NTC 22K automatic compensation or manual adjustment
Compensation	Salinity 0.0 to 45.0 ppt Manual Input
	Pressure 0.500 to 2.500 bar or 7.25 to 36.25 psi Manual Input
Display	Large LCD with auto-sense backlight and contrast adjustment with Text, Chart or Trace Mode (Selectable)
Analog Output	Isolated DC 0/4 to 20 mA corresponding to measurement, max load 500Ω
Serial Communication	RS-485 485 (MODBUS RTU or ASCII)
Calibration	One Point OR Two Point calibration
Event Log	Last 50 Events
Output Relay	Rating 240 VAC, 0.5A max. (recommended)
	Set Point Hi/Lo, Hi/Hi, Lo/Lo selectable two limited programmable, ON/OFF
Wash Relay	Rating 240 VAC, 0.5A max. (recommended)
	Time On: 0-99min. 59sec, Off: 0-999hr 59min.
Ambient Temperature	0 to 50°C
Storage Temperature	-20 to 70°C
Power Supply	100V to 240V AC ± 10%, 50/60Hz, 8W Max.
Installation	Wall mounting, Pipe mounting, Panel mounting
Dimensions	Enclosure H: 144 mm W: 144mm D:115 mm (1/2 DIN)
	Panel Cut out 138 mm x 138 mm
Weight	~ 800 Grams
Protection	IP 65 (NEMA 4X)

Also check out our range of **Retractable Housings** for Liquid Analytics...

**SmartDip 405M**

SmartDip 405M is a retractable electrode housing with pneumatically operated drive Unit. This metal body model can be implemented in harsh chemical applications through flan...

**SmartDip 220M**

SmartDip 220M is a compact retractable electrode housing with manual drive Unit. This metal body model can be implemented in different chemical applications including ferment...

**SmartDip 405P**

SmartDip 405P is a retractable electrode housing with pneumatically operated drive Unit. This plastic body model can be implemented in harsh chemical applications through flan...

**SmartDip 250M**

SmartDip 250M is a manually operated Retractable electrode housing with long immersion lengths and ball valve for isolation. It can fit 120mm long Sensor.

**SmartDip 420M**

SmartDip 420M is a compact retractable electrode housing with pneumatically operated drive Unit. This metal body model can be implemented in different chemical applicatio...

**SmartDip 240M**

SmartDip 240M is a compact retractable electrode housing. This version can fit 120mm long sensor. It comes with 1" NPT, Triclover connection.

**SmartDip 450M**

SmartDip 450M is a pneumatically operated retractable electrode housing with long immersion length and isolation ball valve. This unique model can fit 120mm long sensor.

